



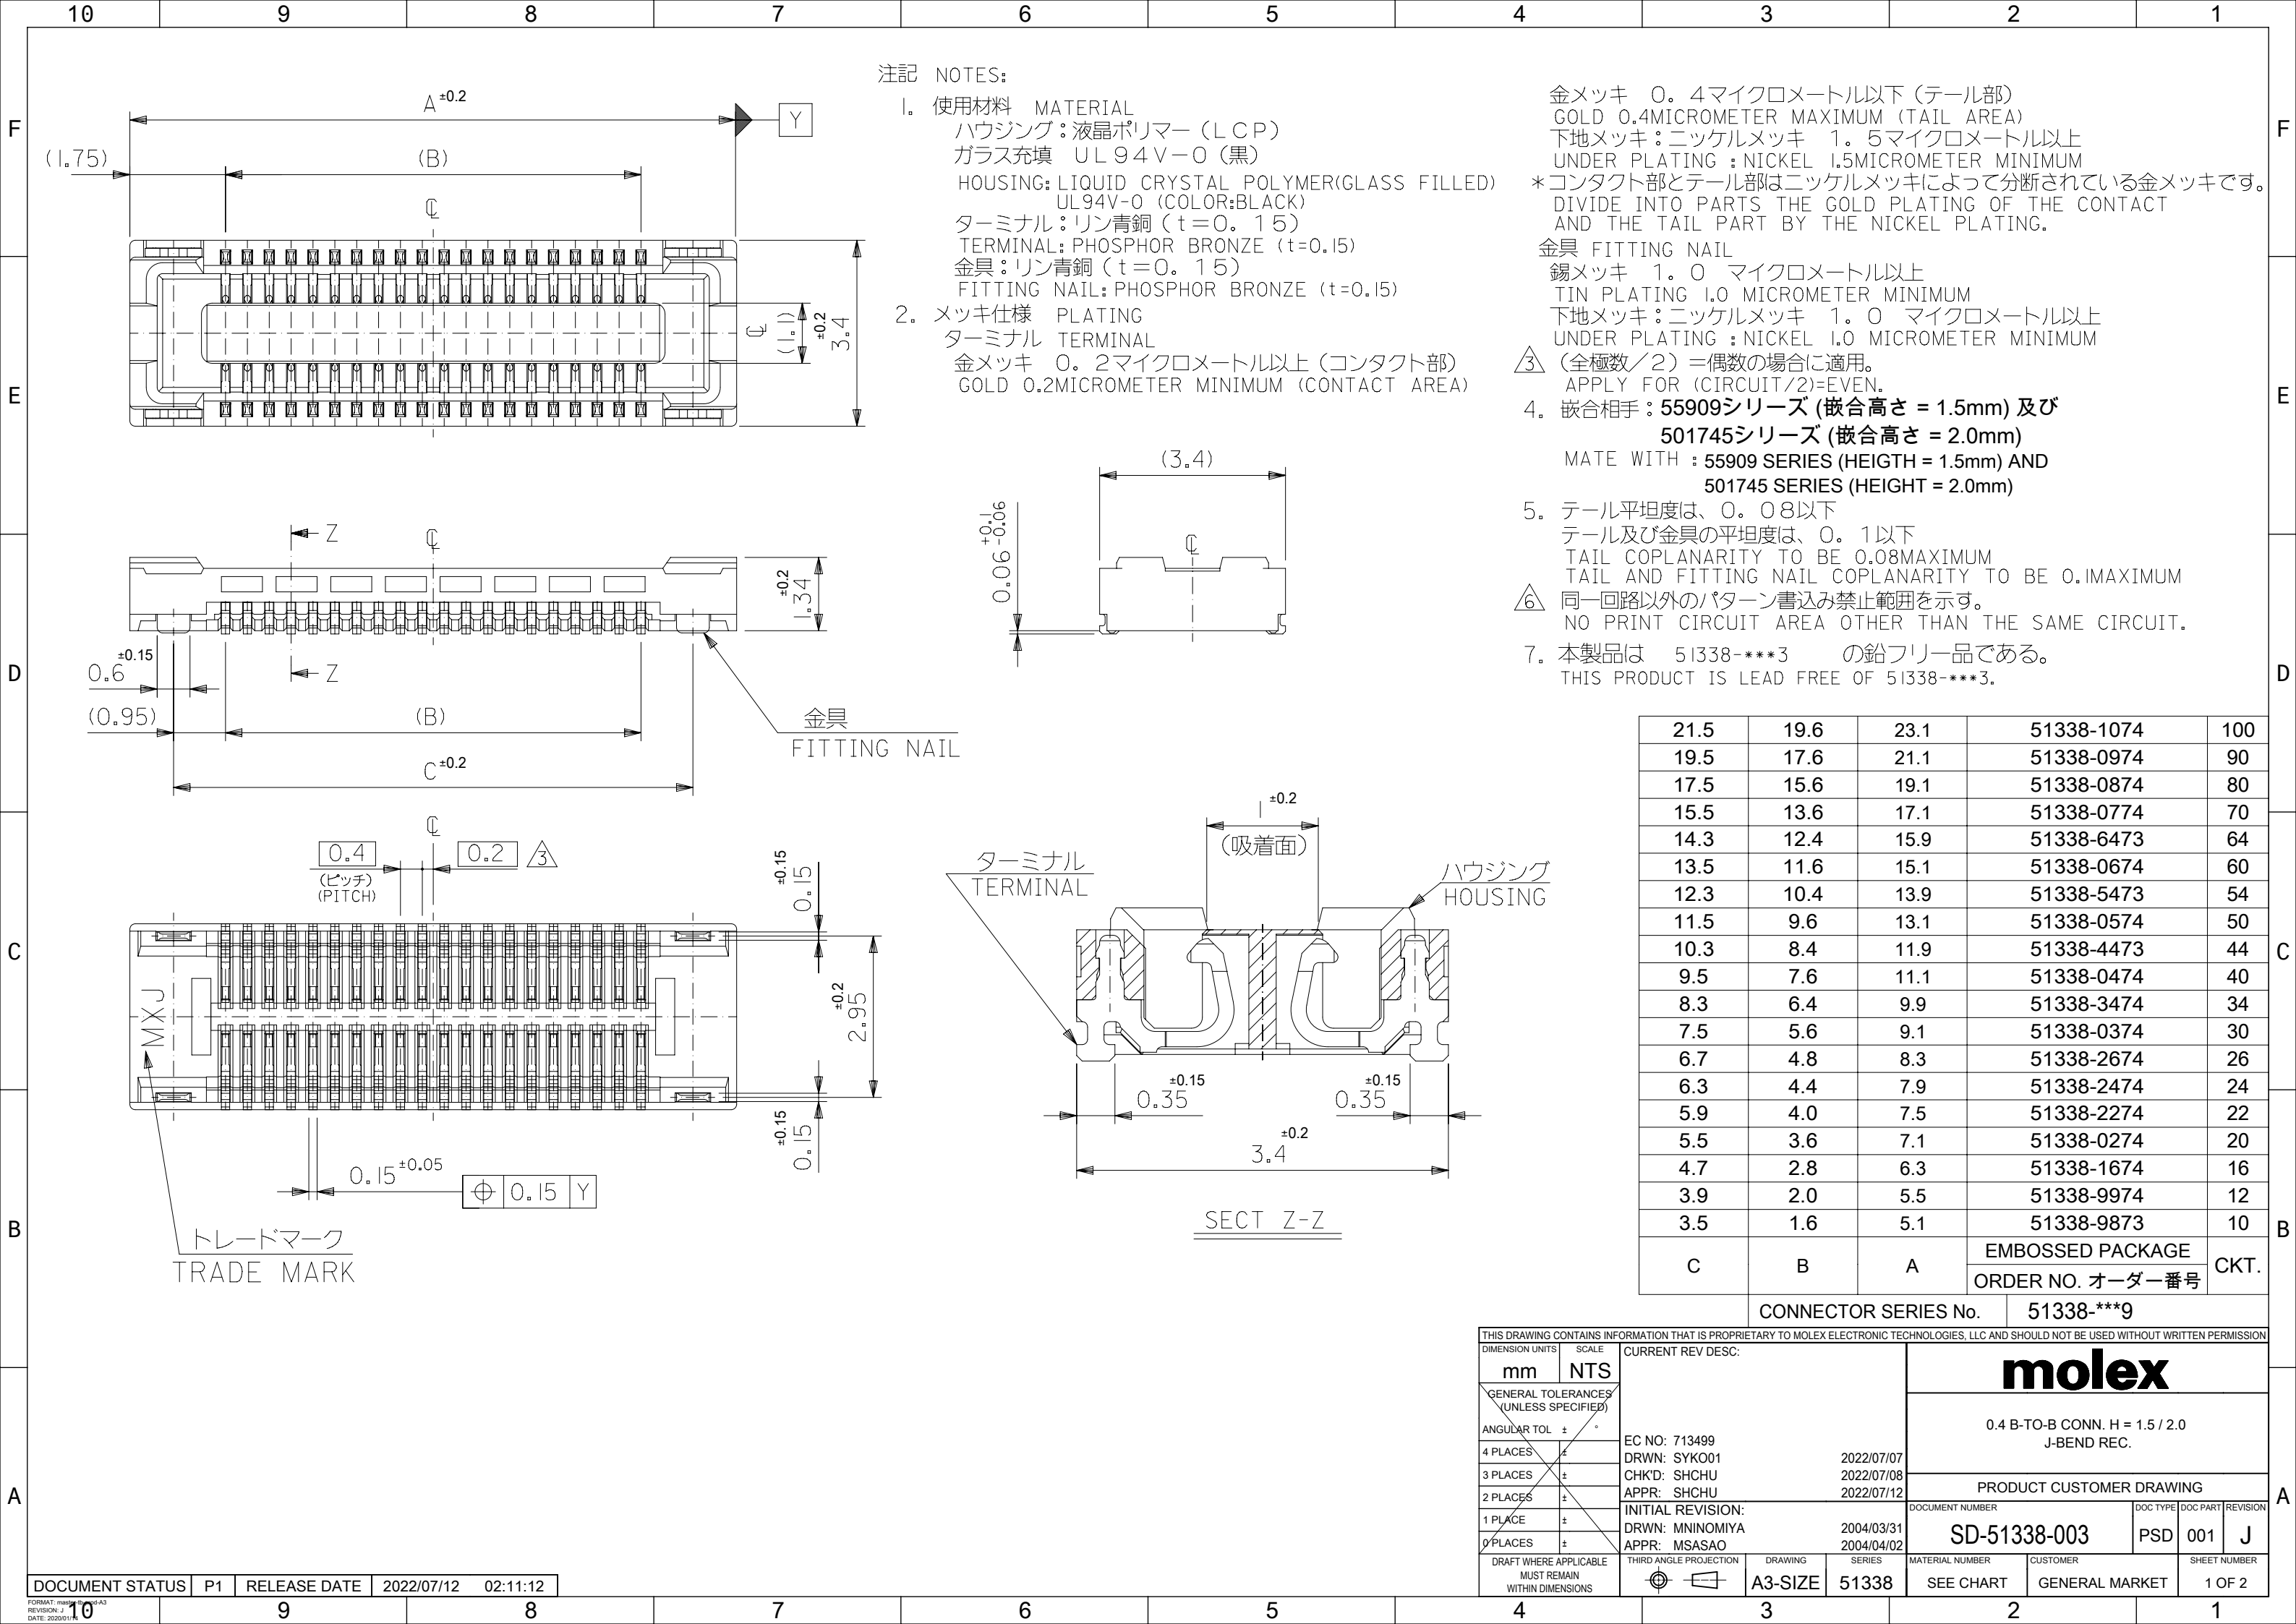

MATE : 51338 WITH 55909


MATE : 51338 WITH 501745

嵌合相手
MATE WITH
55909-****

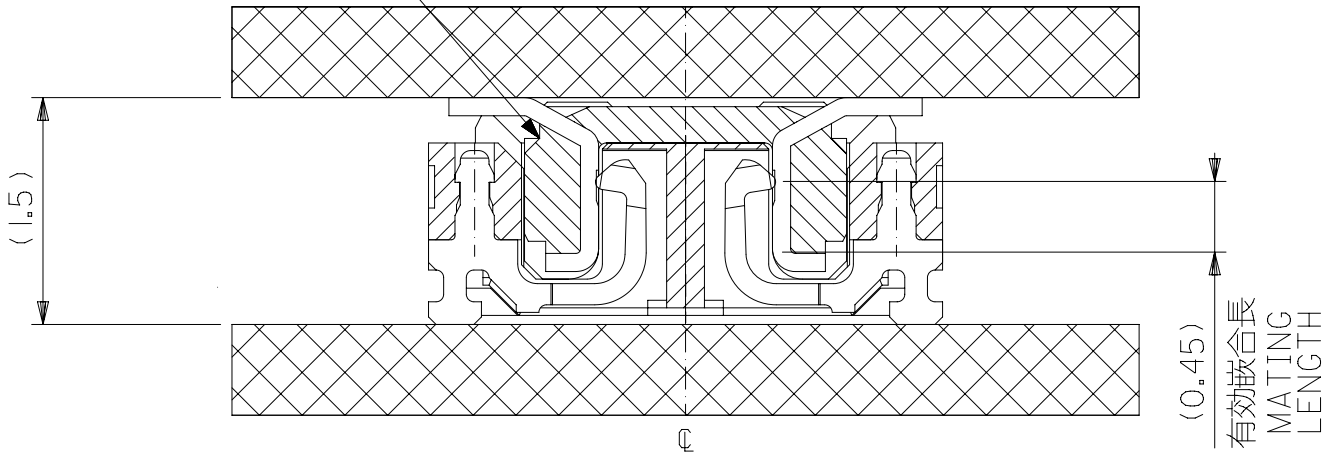


嵌合断面図 (参考)
MATED DRAWING (REFERENCE)

嵌合相手
MATE WITH
501745-0**1

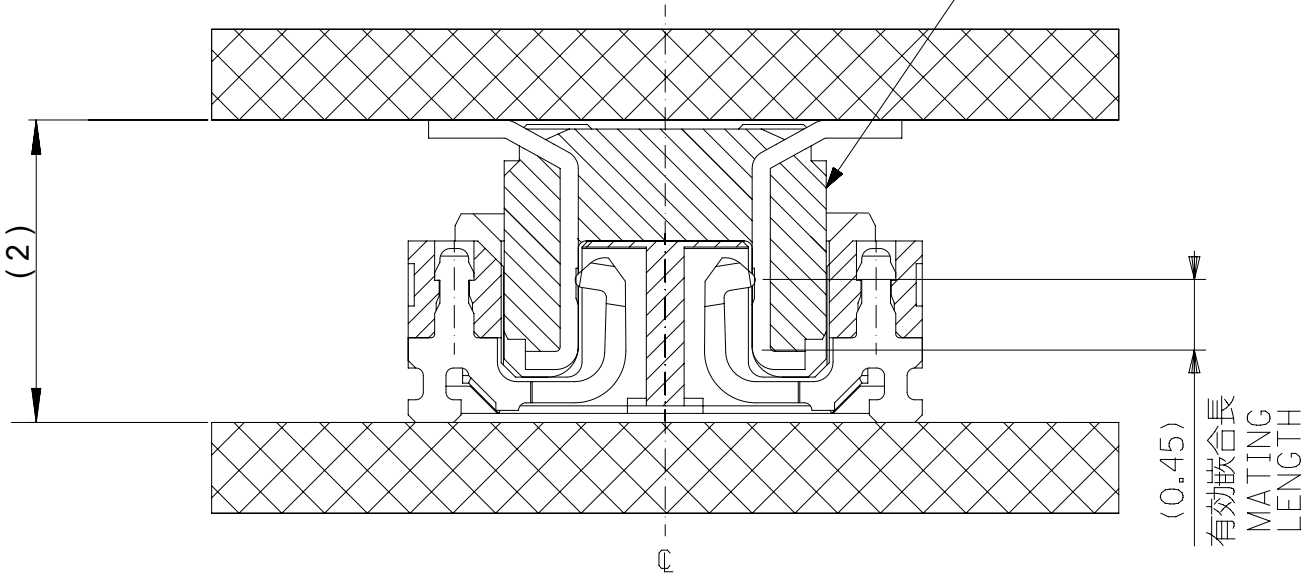

嵌合断面図 (参考)
MATED DRAWING (REFERENCE)

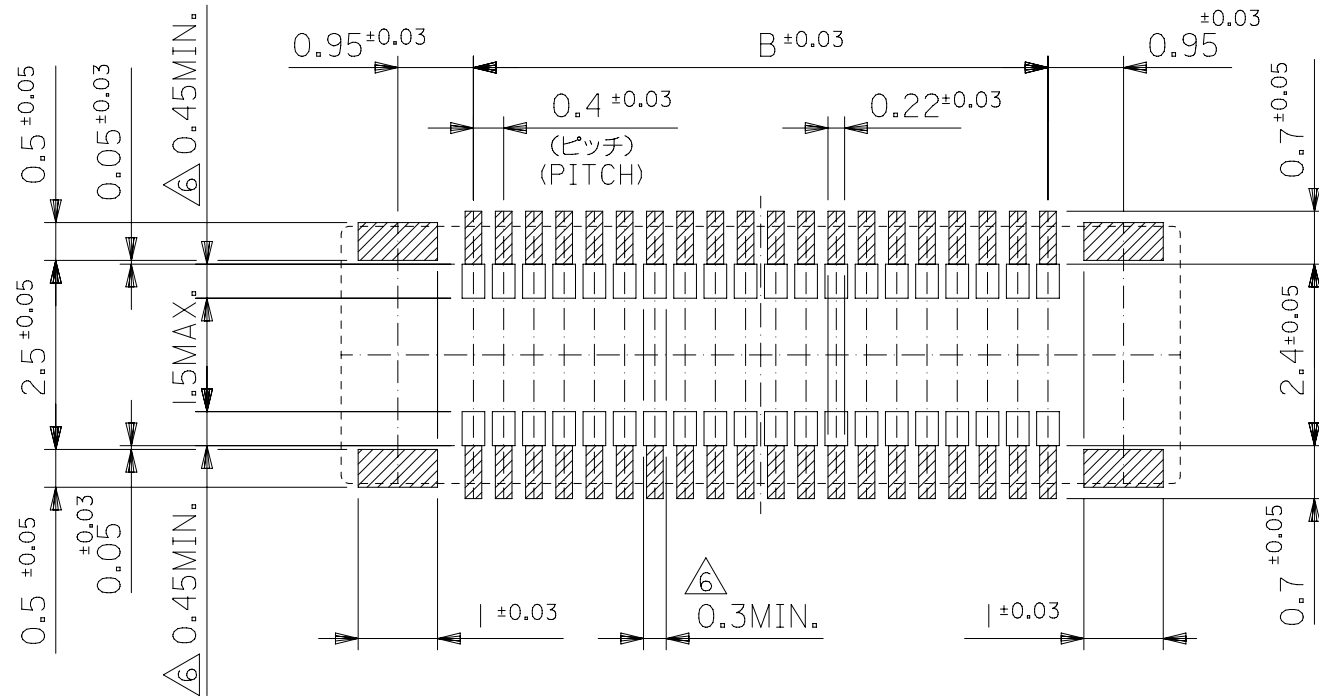


参考基板レイアウト (マウント面)
P.C.BOARD PATTERN DIMENSION. (REFERENCE)
(MOUNTING AREA)


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		molex			
DIMENSION UNITS	SCALE			0.4 B-TO-B CONN. H = 1.5 / 2.0 J-BEND REC.			
mm	NTS			PRODUCT CUSTOMER DRAWING			
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 713499					
ANGULAR TOL ± °		DRWN: SYKO01					
4 PLACES ±		CHK'D: SHCHU					
3 PLACES ±		APPR: SHCHU					
2 PLACES ±		INITIAL REVISION:					
1 PLACE ±		DRWN: MNINOMIYA					
0 PLACES ±		APPR: MSASAO					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION					
		DRAWING					
		SERIES					
		MATERIAL NUMBER					
		CUSTOMER					
		SHEET NUMBER					

NOTES

1. 製品詳細寸法については製品単体図面を参照下さい。
DETAIL DIMENSIONS, SEE PRODUCT DRAWING.
2. 梱包数量：2500個／リール
NUMBER OF CONNECTORS：2500PCS/REEL
3. リードテープ長さ LEAD TAPE LENGTH

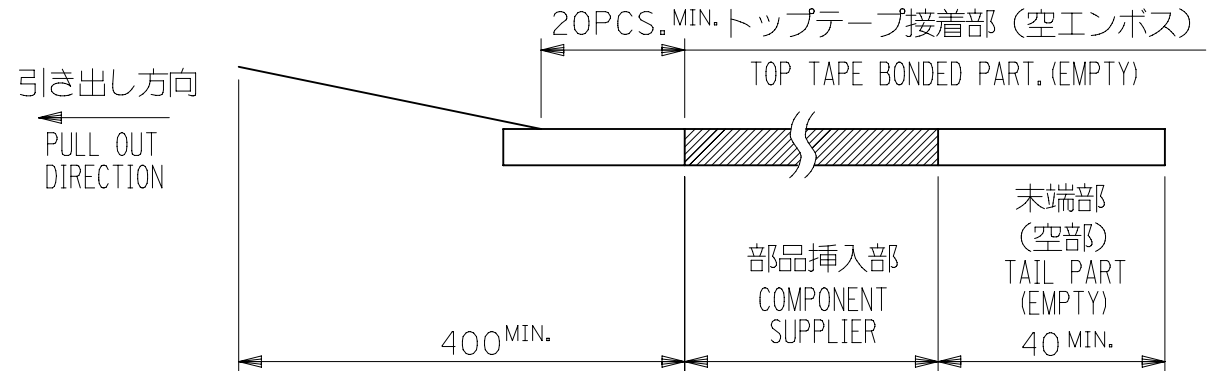



4. トップテープの剥離強度： 0.1N ～ 1.3N{10gf ～ 130gf}
(剥離方向は下図参照)
- 尚、本規格値は出荷時に適用。(但し、輸送時に剥離が発生しないこと。)
PEELING OFF FORCE OF TOP TAPE：0.1N ～ 1.3N{10gf ～ 130gf}
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
PEEL OFF SHOULD NOT BE ALLOWED , DURING TRANSPORTATION.

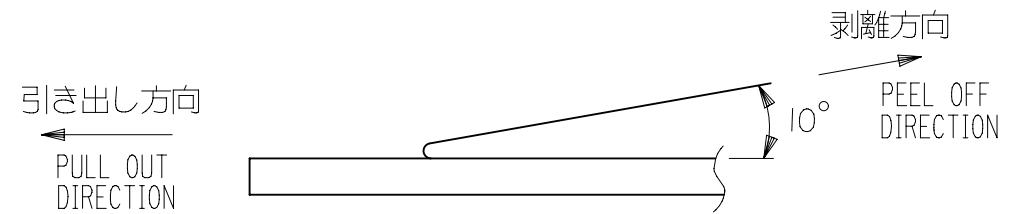

5. 材料
キャリアテープ (CARRIER TAPE)：ポリスチレン (PS)
トップテープ (TOPTAPE)：PET
リール (REEL)：ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>
6. 本製品は 51338-***4 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 51338-***4.

7. ELV 及び RoHS 適合品。
ELV AND RoHS COMPLIANT.

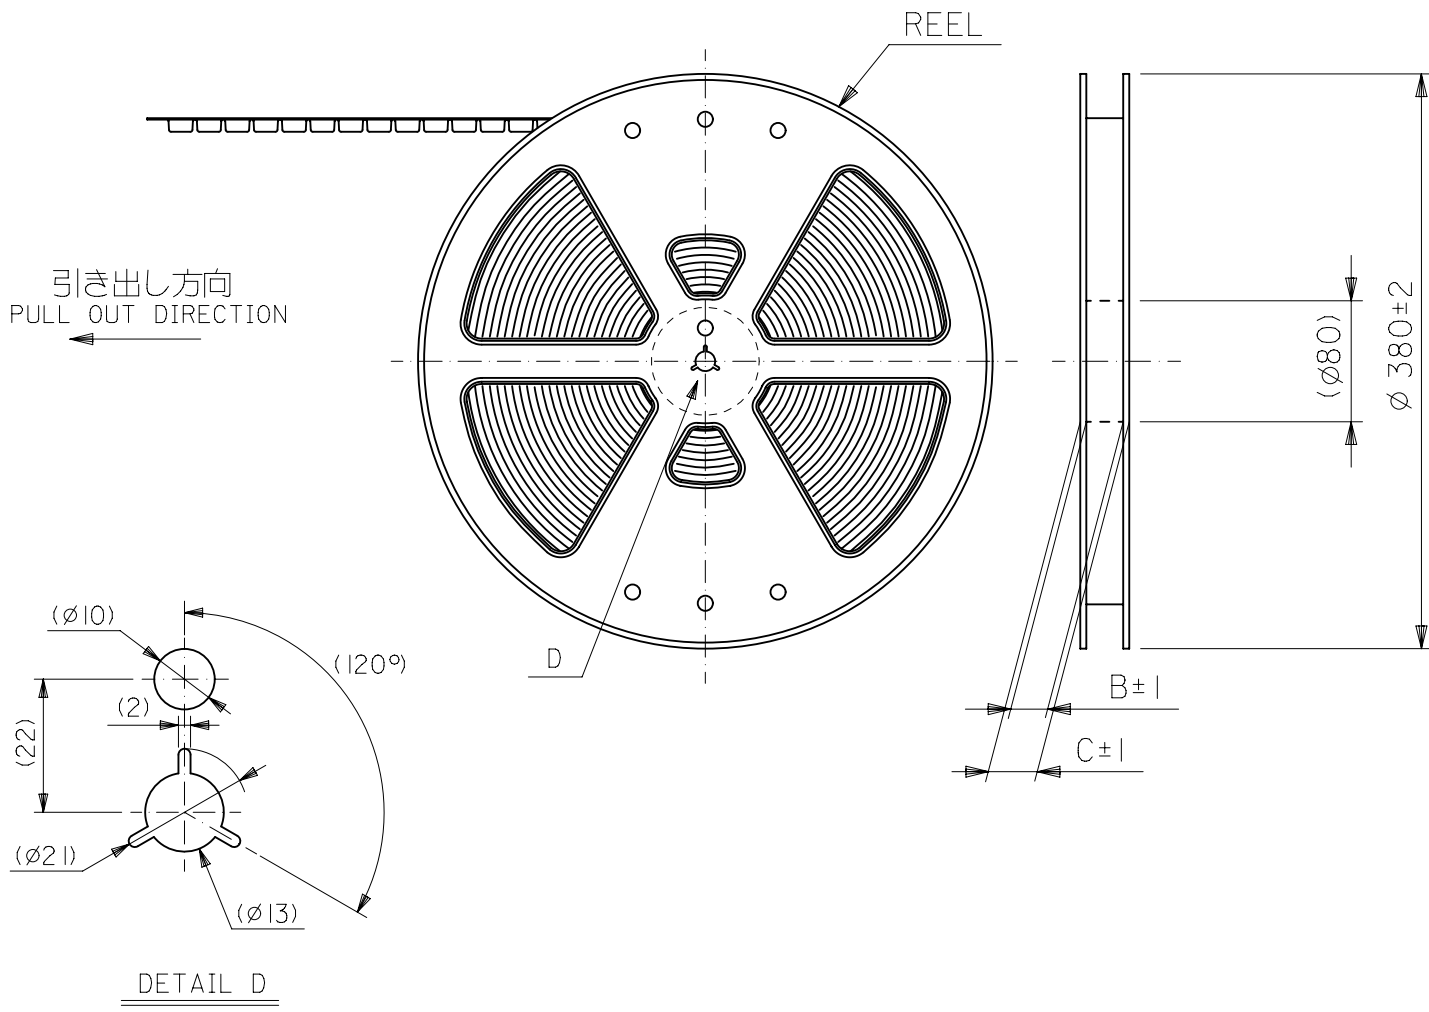


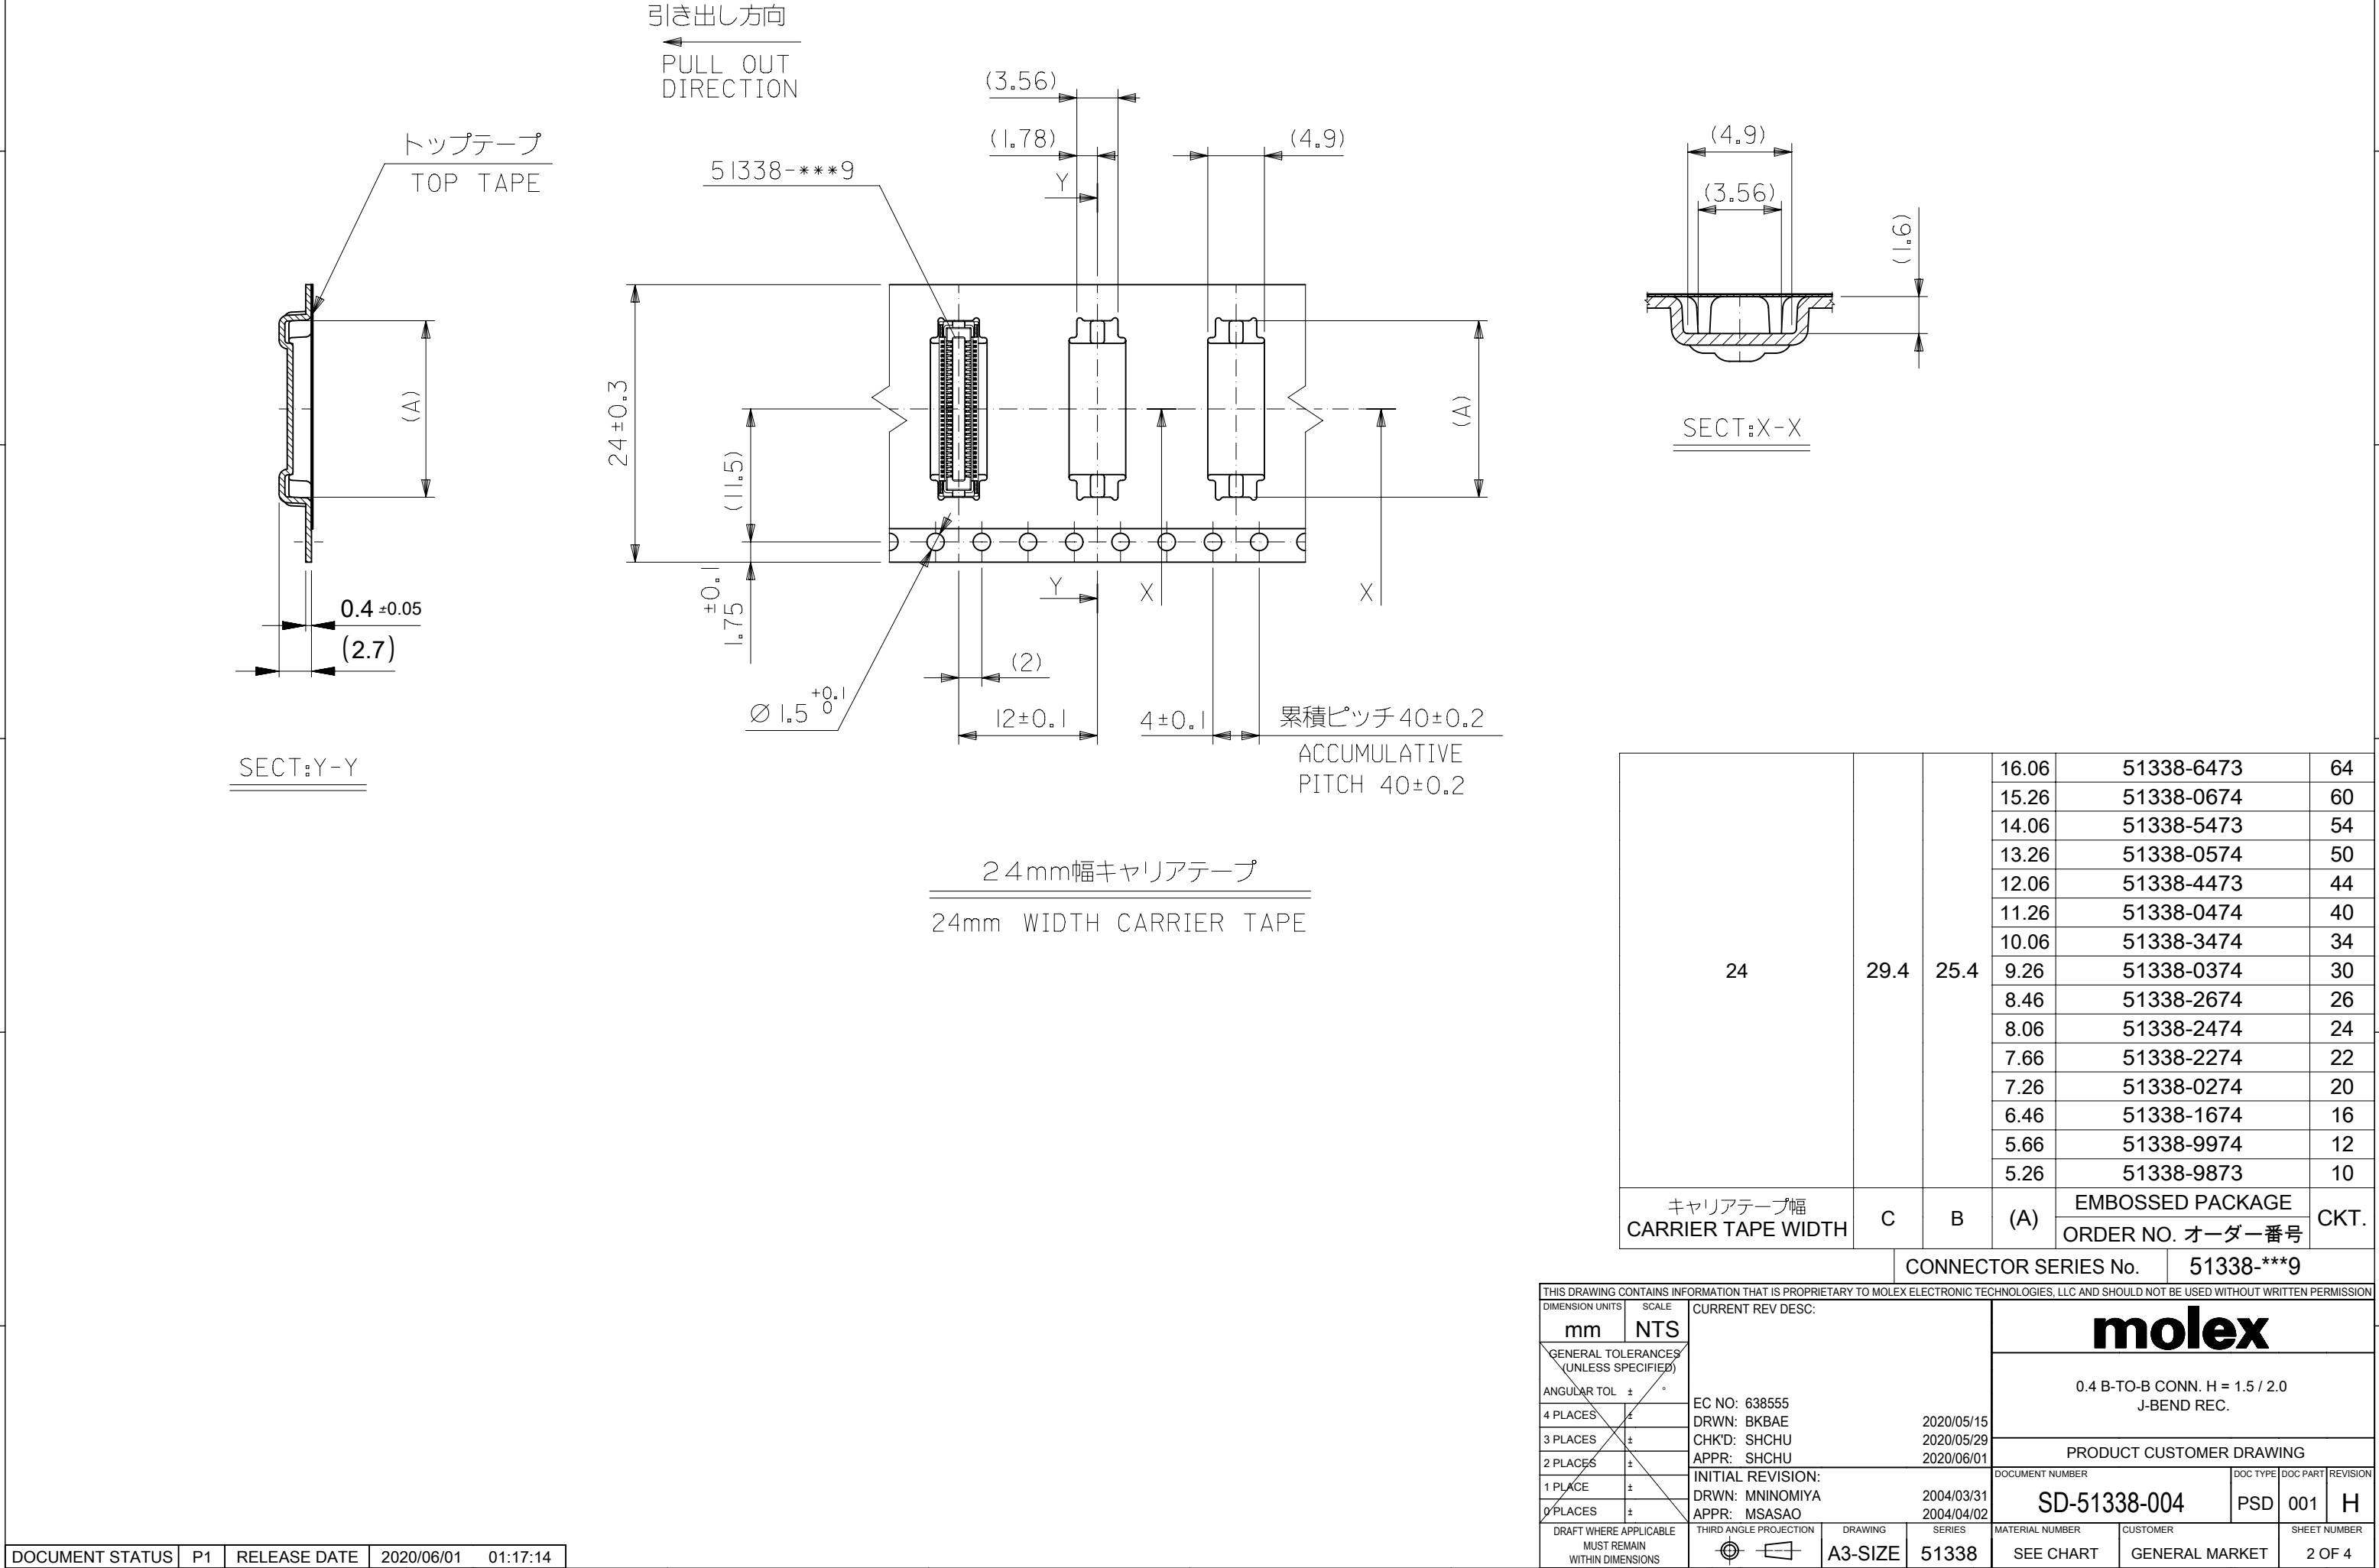

24	29.4	25.4	16.06	51338-6473	64
			15.26	51338-0674	60
			14.06	51338-5473	54
			13.26	51338-0574	50
			12.06	51338-4473	44
			11.26	51338-0474	40
			10.06	51338-3474	34
			9.26	51338-0374	30
			8.46	51338-2674	26
			8.06	51338-2474	24
			7.66	51338-2274	22
			7.26	51338-0274	20
			6.46	51338-1674	16
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	EMBOSSED PACKAGE	CKT.
				ORDER NO. オーダー番号	

CONNECTOR SERIES No.				51338-***9	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
DIMENSION UNITS mm		SCALE NTS		CURRENT REV DESC:	
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 638555		molex	
ANGULAR TOL ± °		DRWN: BKBAE 2020/05/15			
4 PLACES ±		CHK'D: SHCHU 2020/05/29			
3 PLACES ±		APPR: SHCHU 2020/06/01			
2 PLACES ±		INITIAL REVISION:		PRODUCT CUSTOMER DRAWING	
1 PLACE ±		DRWN: MNINOMIYA 2004/03/31		DOCUMENT NUMBER	
0 PLACES ±		APPR: MSASAO 2004/04/02		SD-51338-004	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DOC TYPE DOC PART REVISION	
		DRAWING A3-SIZE		PSD 001 H	
		SERIES 51338		SHEET NUMBER	
		MATERIAL NUMBER		2 OF 4	
		CUSTOMER			
		SEE CHART		GENERAL MARKET	

DOCUMENT STATUS	P1	RELEASE DATE	2020/06/01	01:17:14
-----------------	----	--------------	------------	----------

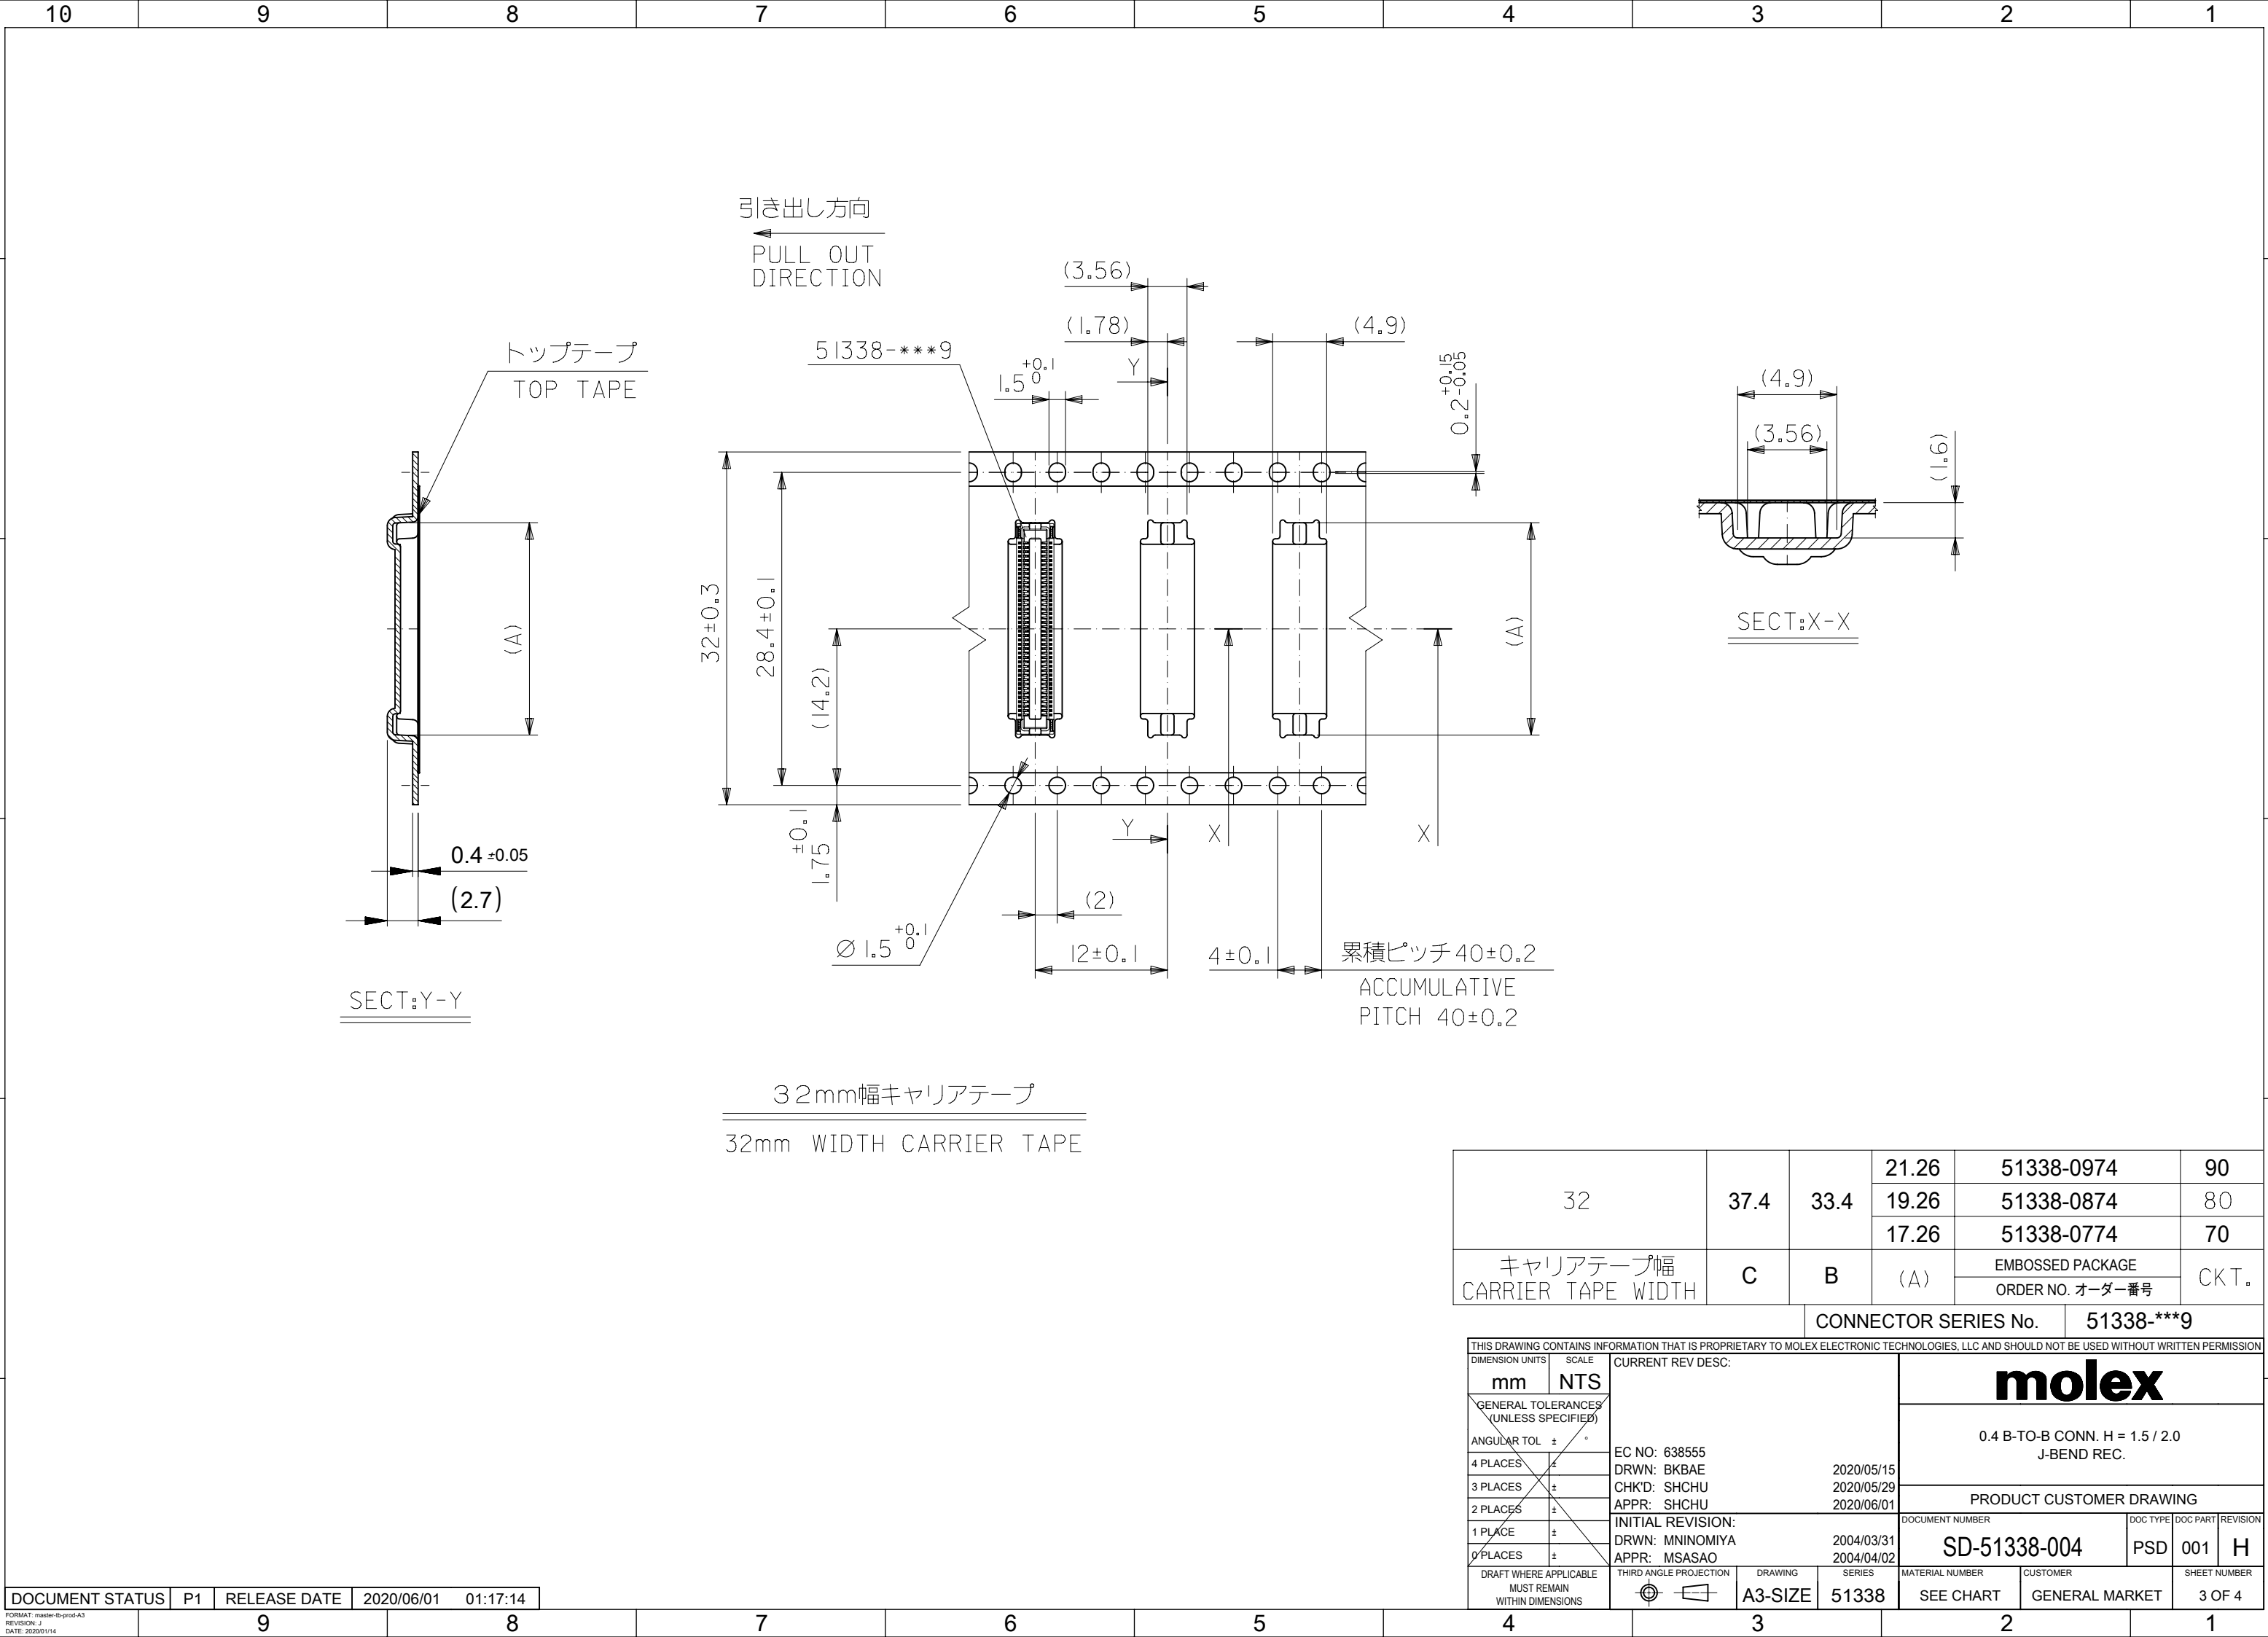

32	37.4	33.4	21.26	51338-0974	90
			19.26	51338-0874	80
			17.26	51338-0774	70
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	EMBOSSED PACKAGE ORDER NO. オーダー番号	CKT.

CONNECTOR SERIES No. 51338-***9

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
CURRENT REV DESC:		molex							
0.4 B-TO-B CONN. H = 1.5 / 2.0 J-BEND REC.									
PRODUCT CUSTOMER DRAWING									
DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION			
SD-51338-004		PSD		001		H			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER	
		A3-SIZE		51338		SEE CHART		GENERAL MARKET	
								SHEET NUMBER	
								3 OF 4	

DOCUMENT STATUS	P1	RELEASE DATE	2020/06/01	01:17:14
-----------------	----	--------------	------------	----------

